



WHATSAPP



WECHAT

Tianchang JT International Trade Co., LTD

TEL: 008618955015380



EMAIL: leo@jt-part.com

www.jt-part.com

JT PART

CATALOGUE 2025



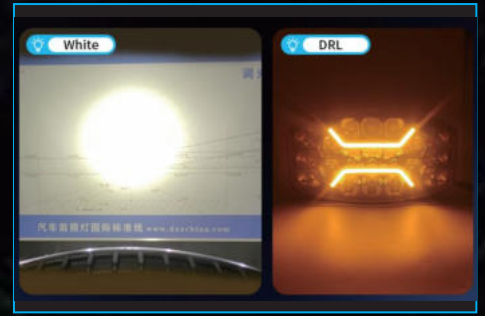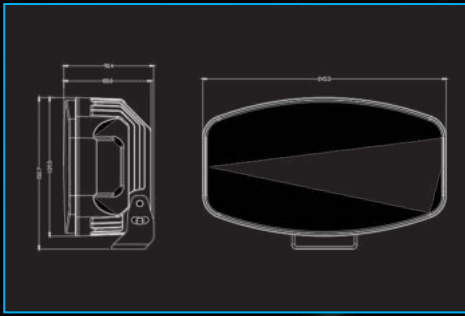

#10C01



PART NO.	10C01
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*10pcs
Power	50W/12V@4.2A
Lm(Theoretical)	10000LM
lux	1lux@576m
Color	White+Amber
Beam pattern	spot+DRL
Cable	45CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	10Pcs/CTN(60*30.5*41.5cm)

#10C02



PART NO.	10C02
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*19pcs
Power	60W/12V@5A
Lm(Theoretical)	19000LM
lux	1lux@1000m
Color	White+Amber
Beam pattern	spot+DRL
Cable	45CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	10Pcs/CTN(60*30.5*41.5cm)

#10C03



PART NO.	10C03
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*12pcs
Power	58W/12V@4.8A
Lm(Theoretical)	12000LM
lux	1lux@885m
Color	White+Amber
Beam pattern	spot+DRL
Cable	45CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	10Pcs/CTN(60*30.5*41.5cm)

#10C04




PART NO.	10C04
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*8pcs
Power	58W/12V@4.8A
Lm(Theoretical)	12000LM
lux	1lux@748m
Color	White+Amber
Beam pattern	spot+DRL
Cable	45CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	10Pcs/CTN(60*30.5*41.5cm)

#10C05



PART NO.	10C05
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*12pcs
Power	58W/12V@4.8A
Lm(Theoretical)	12000LM
lux	1lux@700m
Color	White+Amber
Beam pattern	spot+DRL
Cable	45CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	10Pcs/CTN(60*30.5*41.5cm)



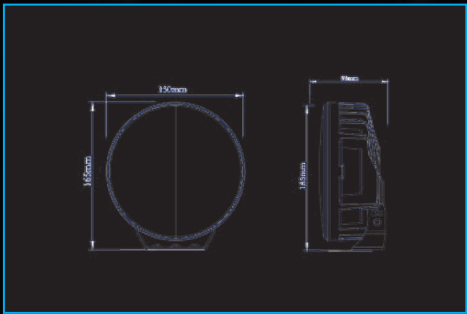

#7R01



PART NO.	7R01
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*14pcs
Power	60W/12V@5A
Lm(Theoretical)	14000LM
lux	1lux@879m
Color	White+Amber
Beam pattern	spot+DRL
Cable	60CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	5Pcs/CTN(57*29*25cm)

#7R02



PART NO.	7R02
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*14pcs
Power	60W/12V@5A
Lm(Theoretical)	14000LM
lux	1lux@948m
Color	White+Amber
Beam pattern	spot+DRL
Cable	60CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	5Pcs/CTN(57*29*25cm)

#7R03



PART NO.	7R03
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(10W)*9pcs
Power	60W/12V@5A
Lm(Theoretical)	13500LM
lux	1lux@496m
Color	White+Amber
Beam pattern	spot+DRL
Cable	60CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	5Pcs/CTN(57*29*25cm)

#7R04





PART NO.	7R04
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(10W)*9pcs
Power	60W/12V@5A
Lm(Theoretical)	13500LM
lux	1lux@823m
Color	White+Amber
Beam pattern	spot+DRL
Cable	60CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	5Pcs/CTN(57*29*25cm)

#7R05



PART NO.	7R05
Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*12pcs
Power	50W/12V@4.2A
Lm(Theoretical)	12000LM
lux	1lux@457m
Color	White+Amber
Beam pattern	spot+DRL
Cable	60CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS, CE.
Packing	5Pcs/CTN(57*29*25cm)



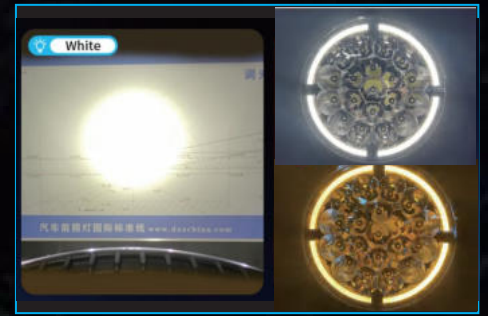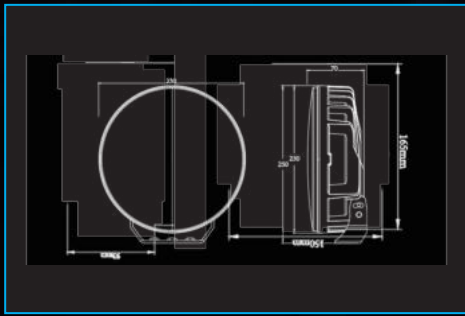

#9R01



#902




#903



#904



#905



PART NO.

9R01

Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*14pcs
Power	82W/12V@6.8A
Lm(Theoretical)	14000LM
lux	1lux@1000m
Color	White+Amber
Beam pattern	spot+DRL
Cable	55CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS. CE.
Packing	5Pcs/CTN(69*34.5*29.5cm)

PART NO.

9R02

Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*24pcs
Power	82W/12V@6.8A
Lm(Theoretical)	24000LM
lux	1lux@1353m
Color	White+Amber
Beam pattern	spot+DRL
Cable	55CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS. CE.
Packing	5Pcs/CTN(69*34.5*29.5cm)

PART NO.

9R03

Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*19pcs
Power	82W/12V@6.8A
Lm(Theoretical)	19000LM
lux	1lux@1332m
Color	White+Amber
Beam pattern	spot+DRL
Cable	55CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS. CE.
Packing	5Pcs/CTN(69*34.5*29.5cm)

PART NO.

9R04








Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*20pcs
Power	82W/12V@6.8A
Lm(Theoretical)	20000LM
lux	1lux@1506m
Color	White+Amber
Beam pattern	spot+DRL
Cable	55CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS. CE.
Packing	5Pcs/CTN(69*34.5*29.5cm)

PART NO.

9R05

Material	Aluminum
Voltage	9-36V DC
LED Chips	3535(5W)*14pcs
Power	82W/12V@6.8A
Lm(Theoretical)	14000LM
lux	1lux@1335m
Color	White+Amber
Beam pattern	spot+DRL
Cable	55CM
IP-class	IP68
Operating temperature	-40°C-85°C
certificate	ROHS. CE.
Packing	5Pcs/CTN(69*34.5*29.5cm)









**PART NO.****4C-BQ-Y****4C-BQ-F**




Material	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC
LED Chips	3030(2W)*8pcs	3030(2W)*12pcs
Power	13.7W/12V@1.1A	13.5W/12V@1.1A
Lm(Theoretical)	1600LM	2400LM
lux	1lux@217m	1lux@233m
Color	White+Amber	White+Amber
Beam pattern	spot	spot
Cable	26CM	26CM
IP-class	IP68	IP68
Operating temperature	-40°C-85°C	-40°C-85°C
certificate	ROHS, CE	ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)

**PART NO.****4C-SQ-Y3****4C-SQ-F3**








Material	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC
LED Chips	3030(1W)*44pcs	3030(1W)*100pcs
Power	17W/12V@1.4A	14W/12V@1.2A
Lm(Theoretical)	4400LM	10000LM
lux	1lux@1158m	1lux@1158m
Color	White	White
Beam pattern	flood	flood
Cable	26CM	26CM
IP-class	IP68	IP68
Operating temperature	-40°C-85°C	-40°C-85°C
certificate	ROHS, CE	ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)

**PART NO.****4C-SQ-Y1****4C-SQ-F1**

Material	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC
LED Chips	3030(1W)*48pcs	3030(1W)*64pcs
Power	17W/12V@1.4A	17W/12V@1.4A
Lm(Theoretical)	4800LM	6400LM
lux	1lux@63m	1lux@66m
Color	White	White
Beam pattern	flood	flood
Cable	26CM	26CM
IP-class	IP68	IP68
Operating temperature	-40°C-85°C	-40°C-85°C
certificate	ROHS, CE	ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)

**PART NO.****4C-SQ-Y2****4C-SQ-F2**

Material	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC
LED Chips	3030(1W)*96pcs	3030(1W)*72pcs
Power	19W/12V@1.5A	19W/12V@1.5A
Lm(Theoretical)	9600LM	7200LM
lux	1lux@44m	1lux@48m
Color	White	White
Beam pattern	flood	flood
Cable	26CM	26CM
IP-class	IP68	IP68
Operating temperature	-40°C-85°C	-40°C-85°C
certificate	ROHS, CE	ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)









PART NO.	4C-BW-F10	4C-BW-F14	4C-BW-F16	4C-BW-F12-X	4C-BW-F16-JT	4C-BW-37F	4C-F1-RGB
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC
LED Chips	3535*10pcs	3030*14pcs	3030*16pcs	3030*12pcs	3030*16pcs	3030*12pcs	3570*1pcs
Power	18W/12V@1.5A	16W/12V@1.3A	18W/12V@1.5A	20W/12V@1.7A	22W/12V@1.8A	14W/12V@1.2A	18W/12V@1.5A
Lm(Theoretical)	4500LM	1400LM	1600LM	2400LM	1600LM	1200LM	4500LM
Color	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber
Beam pattern	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot
Cable	26CM	26CM	26CM	26CM	26CM	26CM	26CM
IP-class	IP68	IP68	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)



PART NO.	4C-BW-Y8	4C-BW-Y12	4C-BW-Y15	4C-BW-Y12-X	4C-BW-Y8-JT	4C-BW-37Y	4C-Y1-RGB
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC
LED Chips	3535*8pcs	3030*12pcs	3030*15pcs	3030*12pcs	3030*8pcs	3030*10pcs	3570*1pcs
Power	19W/12V@1.6A	19W/12V@1.6A	19W/12V@1.6A	22W/12V@1.8A	20W/12V@1.6A	16W/12V@1.3A	17W/12V@1.4A
Lm(Theoretical)	3600LM	3600LM	3600LM	2400LM	1600LM	2000LM	4500LM
Color	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber
Beam pattern	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot
Cable	26CM	26CM	26CM	26CM	26CM	26CM	26CM
IP-class	IP68	IP68	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)



PART NO.	5C-BW-F6	45C-BW-F6	45C-BW-F8	45C-BW-F6X	57C-BW-18	57C-BW-11	57C-BW-9
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC
LED Chips	3535*6pcs	3535*6pcs	3535*8pcs	3535*6pcs	3030*18pcs	3030*11pcs	3030*9pcs
Power	28W/12V@2.37A	28W/12V@2.37A	28W/12V@2.37A	28W/12V@2.37A	34W/12V@2.8A	41W/12V@3.4A	44W/12V@3.7A
Lm(Theoretical)	2700LM	2700LM	3600LM	2700LM	3600LM	2200LM	1800LM
Color	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber
Beam pattern	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL
Cable	27CM	27CM	27CM	27CM	37CM	37CM	37CM
IP-class	IP68	IP68	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	20Pcs/CTN(35*27*32.5cm)	20Pcs/CTN(35*27*32.5cm)	20Pcs/CTN(35*27*32.5cm)




PART NO.	5C-BW-F6	55C-BW-T9	55C-BW-T8X	55C-BW-T10	55C-BW-T8
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC
LED Chips	3535*6pcs	3030*9pcs	3030*8pcs	3030*10pcs	3030*8pcs
Power	25W/12V@2.1A	20W/12V@1.7A	19W/12V@1.6A	22W/12V@1.8A	19W/12V@1.6A
Lm(Theoretical)	2700LM	1800LM	1600LM	2000LM	1600LM
Color	White+Amber	White+Amber	White+Amber	White+Amber	White+Amber
Beam pattern	spot+DRL	spot+DRL	spot+DRL	spot+DRL	spot+DRL
Cable	27CM	27CM	27CM	27CM	27CM
IP-class	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE	-40°C-85°C ROHS, CE
Packing	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(63*34*33cm)	50Pcs/CTN(63*34*33cm)	50Pcs/CTN(63*34*33cm)	50Pcs/CTN(63*34*33cm)



PART NO.	3C-BW-F-F16	45C-BW-F-F32	35C-BW-F-F29	4C-BW-F-Y44	4C-BW-F-F64	55C-BW-F-T36	57C-BW-F-F48
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC
LED Chips	3535*6pcs	3030*32pcs	3030*29pcs	3030*44pcs	3030*64pcs	3030*36pcs	3030*48pcs
Power	25W/12V@2.1A	22W/12V@1.77A	22W/12V@1.76A	22W/12V@1.86A	22W/12V@1.86A	22W/12V@1.9A	24W/12V@1.95A
Lm(Theoretical)	2700LM	3200LM	3500LM	4800LM	6800LM	4000LM	5200LM
Color	White	White	White	White	White	White	White
Beam pattern	flood	flood	flood	flood	flood	flood	flood
Cable	25CM	25CM	25CM	25CM	25CM	25CM	25CM
IP-class	IP68	IP68	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.
	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(67*27*34cm)	50Pcs/CTN(67*27*34cm)	50Pcs/CTN(67*27*34cm)	50Pcs/CTN(67*27*34cm)	50Pcs/CTN(67*27*34cm)	20Pcs/CTN(35*27*32.5cm)



PART NO.	3C-BW-F-F4	45C-F32F	35C-F32F	4C-Y32F	4C-F64F	55C-T36F	57C-F48F
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC	9-36V DC
LED Chips	3030*4pcs	3030*32pcs	3030*32pcs	3030*32pcs	3030*64pcs	3030*36pcs	3030*48pcs
Power	25W/12V@2.1A	24W/12V@2A	26W/12V@2.15A	26W/12V@2.18A	24W/12V@1.97A	26W/12V@2.18A	26W/12V@2.18A
Lm(Theoretical)	2700LM	3200LM	3200LM	3200LM	6400LM	3600LM	4800LM
Color	White	White	White	White	White	White	White
Beam pattern	flood	flood	flood	flood	flood	flood	flood
Cable	25CM	25CM	25CM	25CM	25CM	25CM	25CM
IP-class	IP68	IP68	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.
	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(68*27.5*32cm)	50Pcs/CTN(63*34*33cm)	20Pcs/CTN(35*27*32.5cm)

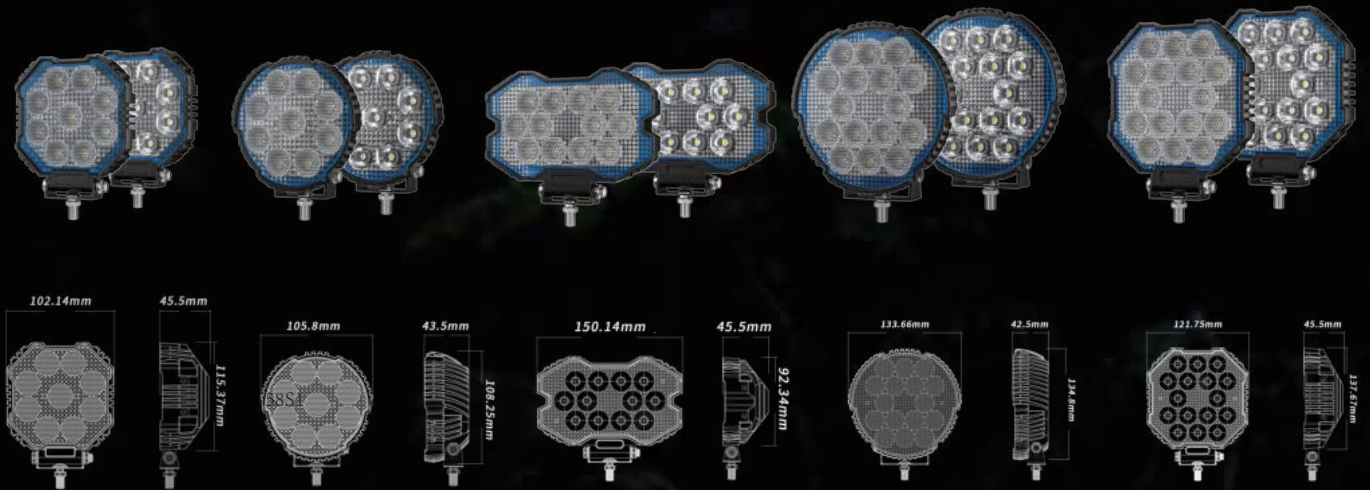

#4S1

#4R1


#58S1

#5R1

#5S1

PART NO.	4S1	4R1	58S1	5R1	5S1
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-30V DC	9-30V DC	9-30V DC	9-30V DC	9-30V DC
LED Chips	3535*9pcs	3535*9pcs	3535*12pcs	3535*16pcs	3535*16pcs
Power	25W/12V@2.1A	25W/12V@2.1A	34W/12V@2.8A	45W/12V@3.7A	45W/12V@3.7A
Lm(Theoretical)	2700LM	2700LM	3600LM	4800LM	4800LM
Color	White	White	White	White	White
Beam pattern	spot	spot	spot	spot	spot
Cable	37CM	37CM	37CM	37CM	37CM
IP-class	IP68	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.	ROHS, CE.
	20Pcs/CTN(38*27*38cm)	20Pcs/CTN(38*28*38cm)	20Pcs/CTN(38*35*38cm)	20Pcs/CTN(46*33*38cm)	20Pcs/CTN(43*31*38cm)







PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

3C04

Aluminum
9-30V DC
3570*2pcs
22W/12V@1.8A
9000LM
White+Amber
spot+DRL
3M
IP68
-40°C-85°C
ROHS. CE.
5Set/CTN(62*32*22cm)


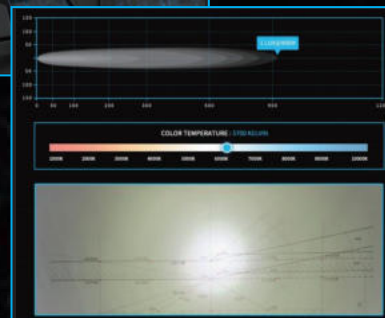


PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

3C01

Aluminum
9-30V DC
3570*3pcs
48W/12V@4A
9000LM
White+Amber
spot+DRL
3M
IP68
-40°C-85°C
ROHS. CE.
5Set/CTN(62*32*22cm)

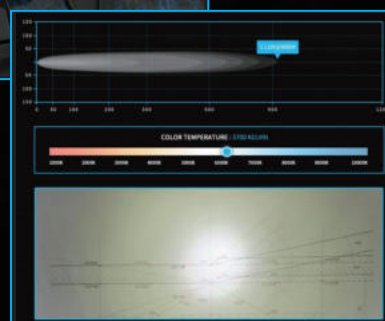



PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

3C03

Aluminum
9-30V DC
3570*4pcs
22W/12V@1.8A
12000LM
White+Amber
spot+DRL
3M
IP68
-40°C-85°C
ROHS. CE.
5Set/CTN(62*32*22cm)

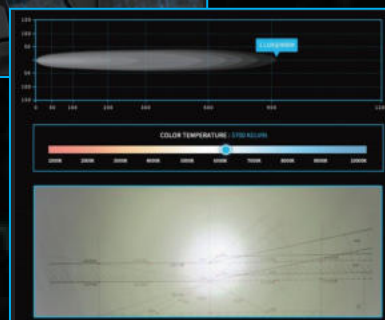





PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

3C02

Aluminum
9-30V DC
3570*4pcs
22W/12V@1.8A
12000LM
White+Amber
spot+DRL
3M
IP68
-40°C-85°C
ROHS, CE
5Set/CTN(62*32*22cm)


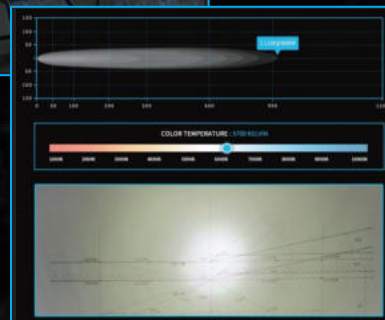


PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

5C01

Aluminum
9-30V DC
p9+3030*4pcs
50W/12V@4A
10000LM
White+Amber
spot+DRL
3M
IP68
-40°C-85°C
ROHS, CE
5Set/CTN(65*31*31cm)

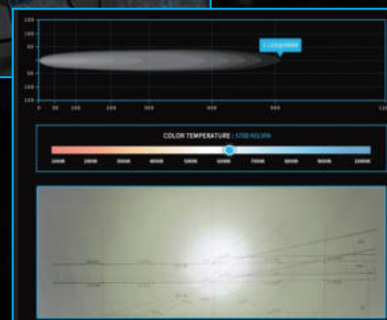



PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

5C02

Aluminum
9-30V DC
p9+3030*4pcs
50W/12V@4A
10000LM
White+Amber
combo+DRL
3M
IP68
-40°C-85°C
ROHS, CE
5Set/CTN(65*31*31cm)

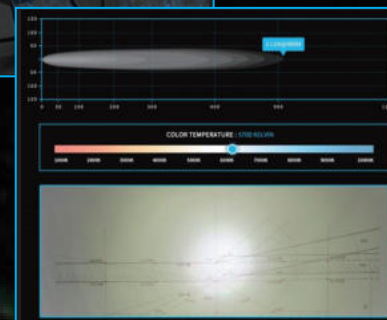





PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

4C01

Aluminum
9-30V DC
3570+5050*5pcs
60W/12V@5A
12000LM
White+Amber
flood+spot
3M
IP68
-40°C-85°C
ROHS, CE.
6Set/CTN(55*37*22cm)


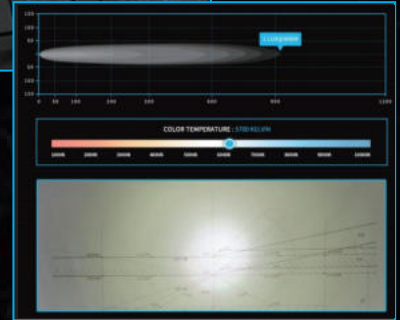


PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing

7C01

Aluminum
9-30V DC
p9+5050*11pcs
60W/12V@5A
12000LM
White
spot
3M
IP68
-40°C-85°C
ROHS, CE.
5Pcs/CTN(64*45*24cm)

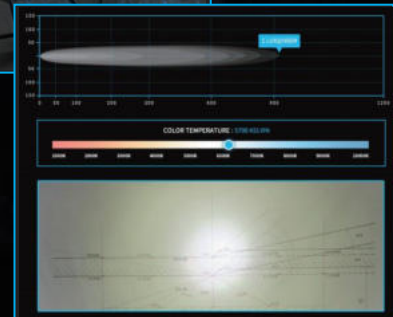


PART NO.

Material
Voltage
LED Chips
Power
Lm(Theoretical)
Color
Beam pattern
Cable
IP-class
Operating temperature
certificate
Packing


9C01

Aluminum
9-30V DC
p9+5050*25pcs
110W/12V@9.2A
18000LM
White
spot
3M
IP68
-40°C-85°C
ROHS, CE.
3Pcs/CTN(64*28*38cm)

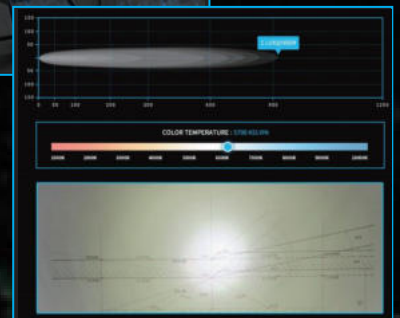






#RS1C





PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
10 inches	Aluminum	9-36V DC	2525*13pcs	30W/12V@2.5A	6000LM	White+Amber	combo	45CM	IP68	-40°C-85°C	ROHS. CE.	8Pcs/CTN(50*41*22cm)
20 inches	Aluminum	9-36V DC	2525*25pcs	45W/12V@3.75A	9000LM	White+Amber	combo	45CM	IP68	-40°C-85°C	ROHS. CE.	8Pcs/CTN(67*41*23cm)
30 inches	Aluminum	9-36V DC	2525*38pcs	70W/12V@5.83A	14000LM	White+Amber	combo	45CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(92*22*21cm)
40 inches	Aluminum	9-36V DC	2525*55pcs	100W/12V@8.3A	20000LM	White+Amber	combo	45CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(118*23*21cm)
50 inches	Aluminum	9-36V DC	2525*64pcs	130W/12V@10.8A	26000LM	White+Amber	combo	45CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(143*23*21cm)

#RS1TJ

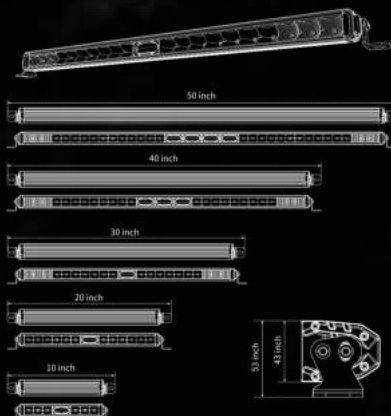

PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
10 inches	Aluminum	9-36V DC	2525*7pcs	20W/12V@1.67A	4000LM	White	combo+DRL	48CM	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(41*39*18cm)
20 inches	Aluminum	9-36V DC	2525*13pcs	30W/12V@2.50A	6000LM	White	combo+DRLt	48CM	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(67*39*18cm)
30 inches	Aluminum	9-36V DC	2525*21pcs	45W/12V@3.75A	9000LM	White	combo+DRL	48CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(92*18*16cm)
40 inches	Aluminum	9-36V DC	2525*27pcs	65W/12V@5.41A	13000LM	White	combo+DRL	48CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(117*18*16cm)
50 inches	Aluminum	9-36V DC	2525*34pcs	83W/12V@6.91A	16600LM	White	combo+DRL	48CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(143*18*16cm)

#RL2C

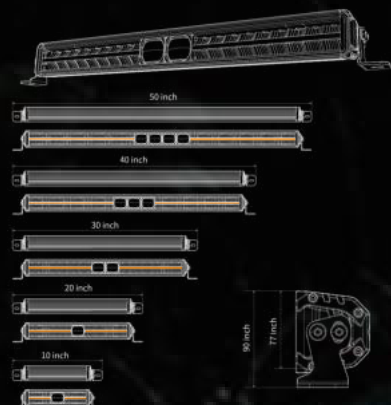

PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
10 inches	Aluminum	9-36V DC	2525*13pcs	30W/12V@2.5A	6000LM	White+Amber	combo+DRL	45CM	IP68	-40°C-85°C	ROHS. CE.	8Pcs/CTN(50*41*22cm)
20 inches	Aluminum	9-36V DC	2525*25pcs	45W/12V@3.75A	9000LM	White+Amber	combo+DRL	45CM	IP68	-40°C-85°C	ROHS. CE.	8Pcs/CTN(67*41*23cm)
30 inches	Aluminum	9-36V DC	2525*38pcs	70W/12V@5.83A	14000LM	White+Amber	combo+DRL	45CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(92*22*21cm)
40 inches	Aluminum	9-36V DC	2525*55pcs	100W/12V@8.3A	20000LM	White+Amber	combo+DRL	45CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(118*23*21cm)
50 inches	Aluminum	9-36V DC	2525*64pcs	130W/12V@10.8A	26000LM	White+Amber	combo+DRL	45CM	IP68	-40°C-85°C	ROHS. CE.	4Pcs/CTN(143*23*21cm)





PART NO.	BF3-A20	BF3-A6	BF3-A4X	BF3-A4
Material	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-32V DC	9-32V DC	9-32V DC	9-32V DC
LED Chips	3030*20pcs	3030*6pcs	3030*4pcs	3030*4pcs
Power	25W/12V@2.1A	23W/12V@1.9A	21W/12V@1.78A	22W/12V@1.85A
Lm(Theoretical)	2000LM	2400LM	3200LM	4400LM
Color	White	White+Yellow	White+Yellow	White+Yellow
Beam pattern	flood	spot+flood	spot	spot
Cable	3M	3M	3M	3M
IP-class	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	10Pcs/CTN(37.5*25*42.5cm)	10Pcs/CTN(53.5*33.5*46cm)	10Pcs/CTN(53.5*33.5*46cm)	10Pcs/CTN(53.5*33.5*46cm)



PART NO.	BF3-B20	BF3-B6	BF3-B4X	BF3-B4
Material	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-32V DC	9-30V DC	9-32V DC	9-32V DC
LED Chips	3030*20pcs	3030*6pcs	3030*4pcs	3030*4pcs
Power	25W/12V@2.1A	23W/12V@1.9A	21W/12V@1.78A	22W/12V@1.85A
Lm(Theoretical)	2000LM	2400LM	3200LM	4400LM
Color	White	White+Yellow	White+Yellow	White+Yellow
Beam pattern	flood	spot+flood	spot	spot
Cable	3M	3M	3M	3M
IP-class	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	10Pcs/CTN(37.5*25*42.5cm)	10Pcs/CTN(53.5*33.5*46cm)	10Pcs/CTN(53.5*33.5*46cm)	10Pcs/CTN(53.5*33.5*46cm)



PART NO.	BF6-1F-20	BF6-1F-6	BF6-1F-5	BF6-1F-4
Material	Aluminum	Aluminum	Aluminum	Aluminum
Voltage	9-32V DC	9-32V DC	9-32V DC	9-32V DC
LED Chips	3030*20pcs	3030*6pcs	3030*6pcs	3030*16pcs
Power	19W/12V@1.6A	18W/12V@1.5A	18W/12V@1.5A	19W/12V@1.6A
Lm(Theoretical)	2000LM	2000LM	2000LM	2000LM
Color	White	White+Yellow	White+Yellow	White+Yellow
Beam pattern	flood	spot	spot	flood
Cable	3M	3M	3M	3M
IP-class	IP68	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	10Pcs/CTN(37*24.57*44cm)	10Pcs/CTN(37*24.5*44cm)	10Pcs/CTN(37*24.5*44cm)	10Pcs/CTN(37*24.5*44cm)



PART NO.	BF4-14	BF4-10	BF4-9
Material	Aluminum	Aluminum	Aluminum
Voltage	9-32V DC	9-32V DC	9-32V DC
LED Chips	3030*14pcs	3030*10pcs	3030*9pcs
Power	25W/12V@2.1A	25W/12V@2.1A	24.6W/12V@2A
Lm(Theoretical)	2600LM	2600LM	2600LM
Color	White+Yellow	White+Yellow	White+Yellow
Beam pattern	spot	spot	spot
Cable	3M	3M	3M
IP-class	IP68	IP68	IP68
Operating temperature certificate	-40°C-85°C	-40°C-85°C	-40°C-85°C
Packing	5Pcs/CTN(33.5*27*46cm)	5Pcs/CTN(33.5*27*46cm)	5Pcs/CTN(33.5*27*46cm)





PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
KIT-M-N-M1	Aluminum	9-32V DC	3570*1pcs	38W/12V@3.2A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-N-S1	Aluminum	9-32V DC	3570*1pcs	40W/12V@3.3A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-N-S2	Aluminum	9-32V DC	3570*2pcs	47W/12V@3.9A	9000LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)



PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
KIT-M-F15-B	Aluminum	9-32V DC	3570*1pcs	28W/12V@2.3A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-M1	Aluminum	9-32V DC	3570*1pcs	30W/12V@2.5A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-F15	Aluminum	9-32V DC	3570*1pcs	34W/12V@2.8A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)



PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
KIT-M-N-Z2	Aluminum	9-32V DC	3570*2pcs	37W/12V@2.9A	9000LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-N-M20	Aluminum	9-32V DC	3570*2pcs	35W/12V@3.1A	9000LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-N-M30	Aluminum	9-32V DC	3570*3pcs	38W/12V@3.9A	13500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)




PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
KIT-M-N-24W	Aluminum	9-32V DC	3570*2pcs	47W/12V@2.7A	9000LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-M-N-MB	Aluminum	9-32V DC	3570*1pcs	32W/12V@3.2A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)
KIT-MINI-M-N-MB	Aluminum	9-32V DC	3570*1pcs	34W/12V@2.8A	4500LM	White+Amber	spot	3M	IP68	-40°C-85°C	ROHS. CE.	10Pcs/CTN(53.5*24*39cm)






PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
GD-COB-2	Aluminum	9-36V DC	COB*2pcs	10W/12V	600LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(51×27×28cm)
GD-COB-3	Aluminum	9-36V DC	COB*3pcs	15W/12V	900LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(65×27×28cm)
GD-COB-4	Aluminum	9-36V DC	COB*4pcs	20W/12V	1200LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(80×27×28cm)
GD-COB-5	Aluminum	9-36V DC	COB*5pcs	25W/12V	1500LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(95×27×28cm)
GD-COB-6	Aluminum	9-36V DC	COB*6pcs	30W/12V	1800LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(109×27×28cm)
GD-COB-7	Aluminum	9-36V DC	COB*7pcs	35W/12V	2100LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(123×27×28cm)
GD-COB-8	Aluminum	9-36V DC	COB*8pcs	40W/12V	2400LM	White	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(137×27×28cm)

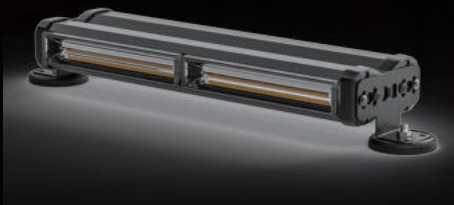

PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
GD-COB-CT-2	Aluminum	9-36V DC	COB*4pcs	20W/12V	1200LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(36×23×38cm)
GD-COB-CT-3	Aluminum	9-36V DC	COB*6pcs	30W/12V	1800LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(51×23×38cm)
GD-COB-CT-4	Aluminum	9-36V DC	COB*8pcs	40W/12V	2400LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(65×23×38cm)
GD-COB-CT-5	Aluminum	9-36V DC	COB*10pcs	50W/12V	3000LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(80×23×38cm)
GD-COB-CT-6	Aluminum	9-36V DC	COB*12pcs	60W/12V	3600LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(95×23×38cm)
GD-COB-CT-7	Aluminum	9-36V DC	COB*14pcs	70W/12V	4200LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(109×23×38cm)
GD-COB-CT-8	Aluminum	9-36V DC	COB*16pcs	80W/12V	4800LM	Amber	flash (12Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	10Pcs/CTN(123×23×38cm)



PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
GD-3030-15LED-2	Aluminum	9-36V DC	15LED*2pcs	8W/12V	600LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(51×27×28cm)
GD-3030-15LED-4	Aluminum	9-36V DC	15LED*4pcs	16W/12V	1200LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(51×27×28cm)
GD-3030-15LED-6	Aluminum	9-36V DC	15LED*6pcs	24W/12V	1800LM	White+Amber	flash (24Patterns)	3CM	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(80×27×28cm)
GD-3030-15LED-8	Aluminum	9-36V DC	15LED*8pcs	32W/12V	2400LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(95×27×28cm)
GD-3030-15LED-10	Aluminum	9-36V DC	15LED*10pcs	40W/12V	3000LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(137×27×28cm)



PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
GD-3030-4LED-2	Aluminum	9-36V DC	4LED*2pcs	8W/12V	600LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(51×27×28cm)
GD-3030-4LED-4	Aluminum	9-36V DC	4LED*4pcs	16W/12V	1200LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(51×27×28cm)
GD-3030-4LED-6	Aluminum	9-36V DC	4LED*6pcs	24W/12V	1800LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(80×27×28cm)
GD-3030-4LED-8	Aluminum	9-36V DC	4LED*8pcs	32W/12V	2400LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(95×27×28cm)
GD-3030-4LED-10	Aluminum	9-36V DC	4LED*10pcs	40W/12V	3000LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(137×27×28cm)



PART NO.	Material	Voltage	LED Chips	Power	Lm(Theoretical)	Color	Beam pattern	Cable	IP-class	Operating temperature	certificate	Packing
GD-3030-6LED-2	Aluminum	9-36V DC	6LED*2pcs	10W/12V	800LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(51×27×28cm)
GD-3030-6LED-4	Aluminum	9-36V DC	6LED*4pcs	20W/12V	1600LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(80×27×28cm)
GD-3030-6LED-6	Aluminum	9-36V DC	6LED*6pcs	30W/12V	2400LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(109×27×28cm)
GD-3030-6LED-8	Aluminum	9-36V DC	6LED*8pcs	40W/12V	3200LM	White+Amber	flash (24Patterns)	3M	IP65	-40°C-85°C	ROHS. CE.	20Pcs/CTN(137×27×28cm)





RGB WHIP LIGHT

Size	Specs	Specs
60CM	2FT	2FT(2PCS)
90CM	3FT	3FT(2PCS)
120CM	4FT	4FT(2PCS)
150CM	5FT	5FT(2PCS)
180CM	6FT	6FT(2PCS)

LED 12-24V RGB IP67 E

